



# 500 BBL V BOTTOM LIQUID STORAGE TANK

## ▶ COMMON USES

The 500 bbl V Bottom Liquid Storage Tank is commonly used on oilfields to store drilling, production or completion fluids, in addition to base oils, chemicals, fuel, brine and other liquids.


## ▶ TECHNICAL DATA

DIMENSIONS	L X W X H	
EXTERNAL SKID (MM)	13919 x 2591 x 2959	
EXTERNAL SKID (FT)	45'8" x 8'6" x 9'8.5"	
WEIGHT	KGS	LBS
TARE WEIGHT	12927	28500
ADDITIONAL FEATURES		
<ul style="list-style-type: none"> <li>Sides: 1/4" corrugated steel plate tank solid</li> <li>Weld construction</li> <li>Floor: 1/4" steel plate "v-bottom" construction</li> <li>Roof: flat top, 1/4" steel plate with channel</li> <li>Kingpin: 1" ground clearance when ready to work</li> <li>Heavy duty nose bar assembly</li> <li>Axle: 25,000 lb with air brakes, 11.00 X 22.5</li> <li>Tires on steel disc wheels</li> <li>Manway: (2) sealed manways (side &amp; front)</li> <li>4" Half pipe drain w/ 4" butterfly valve</li> <li>All interior surfaces lined with epoxy coating</li> </ul>		
Notes:		
<ul style="list-style-type: none"> <li>Some details not shown in all views</li> <li>Overall dimension are nominal</li> <li>22" Wide stairway</li> </ul>		




## ▶ DRAWINGS

TOP VIEW

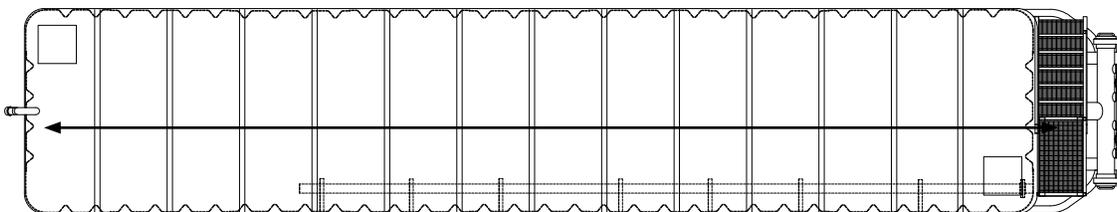

SIDE VIEW

13919 MM [548"] [45'8"]

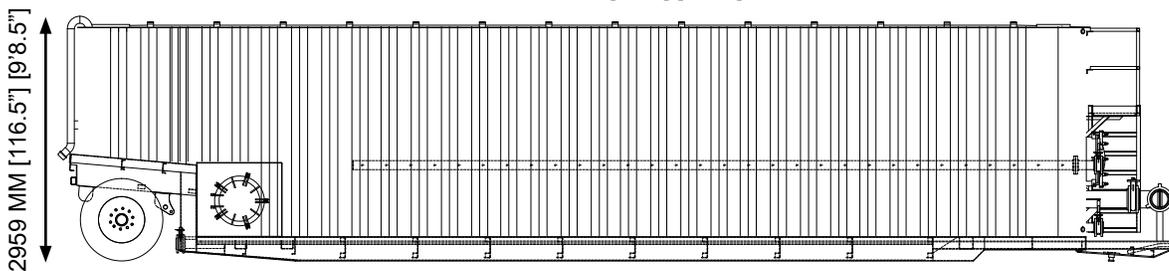

FRONT VIEW

2591 MM [102"] [8'6"]

